

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification:
G02F 1/125

A1

(11) International Publication Number: WO 99/06876

(43) International Publication Date: 11 February 1999 (11.02.99)

(21) International Application Number: PCT/EP98/04109

(22) International Filing Date: 3 July 1998 (03.07.98)

(30) Priority Data:

97113188.3

31 July 1997 (31.07.97)

EP

60/054,818

5 August 1997 (05.08.97)

US

(71) Applicant (for all designated States except US): PIRELLI CAVI E SISTEMI S.P.A. [IT/IT]; Viale Sarca, 222, I-20126 Milan (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): SCHMID, Steffen [DE/IT]; Via Carlo Porta, 19/4, I-20052 Monza (IT).


(74) Common Representative: PIRELLI CAVI E SISTEMI S.P.A.; Viale Sarca, 222, I-20126 Milan (IT).

(81) Designated States: AU, BR, CA, CN, JP, KR, NZ, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published

With international search report.

(54) Title: ACOUSTO-OPTIC DEVICES HAVING AN ACOUSTIC ATTENUATOR STRUCTURE

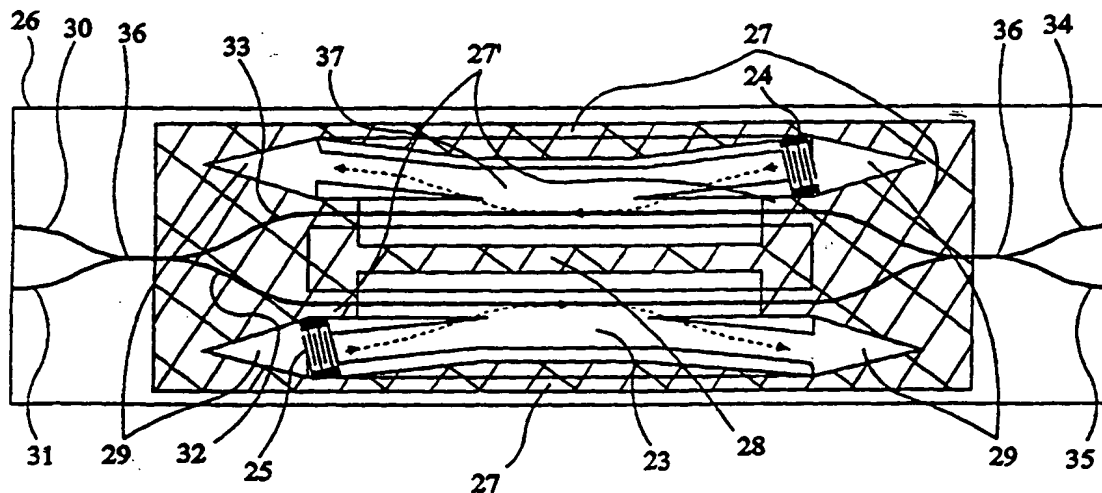

(57) Abstract

Disclosed is an acousto-optic device having a number of acoustic attenuating structures and a method to limit the parasitic effects of a surface acoustic wave. The structures include any combination of the following: surrounding the acousto-optic conversion region with acoustic absorber, placing acoustic absorber near to the transducer(s), placing a strip of acoustic absorber between optical waveguides formed in the device, shaping one or more ends of acoustic waveguides formed in the device to absorb energy from the transducer(s), and/or extending the acoustic waveguides to further limit irradiation of unguided acoustic waves.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

ACOUSTO-OPTIC DEVICES HAVING AN ACOUSTIC ATTENUATOR STRUCTURE

Background of the Invention

5 The present invention relates generally to acousto-optic devices, and more particularly to absorbing surface acoustic waves in acousto-optic devices.

Integrated acousto-optic devices function through the interaction of surface acoustic waves (SAWs) on a crystal surface with light traversing the crystal. An example of an acousto-optic device is shown in Fig. 1. The device is a 2 x 2 tunable
10 optic switch having optical waveguides 10, 11, 17, 18, 19, and 20, with two bending sections 22a and 22b along a region of optical waveguides 17 and 18. The device also has acoustic waveguides 12 and 13, piezoelectric transducers 14 and 15, and polarization splitters 21. The device is formed on the surface of a crystal 16, such as LiNbO₃. When electrically stimulated, transducers 14 and 15 produce SAWs that
15 travel through acoustic waveguides 12 and 13 and interact with light passing through optical waveguides 17 and 18.

The inventor has recognized, however, that non-ideal behavior of the SAW gives rise to parasitic effects. First, the SAW may be scattered due to inhomogeneities on the surface of the crystal. Inhomogeneities can be caused, for
20 example, by indiffusion of dopants, surface impurities, additional surface layers, or by the borders of the substrate. The scattered SAW disturbs the acousto-optic interaction between the SAW and the light traveling through the waveguides.

The SAW can be scattered, or it can be reflected by the inhomogeneities, or by the acoustic waveguides. Scattered or reflected acoustic waves can interfere with
25 other acoustic waves. The resulting interference pattern changes with the wavelength of the SAW resulting in wavelength dependent characteristics of the acousto-optic device.

Further, the structure that generates the SAW (e.g., piezoelectric transducers 14 and 15 of Fig. 1) does not necessarily generate directed waves. Rather, the
30 waves irradiate in various directions, degrading device performance.

Other problems associated with conventional acousto-optic devices include internal reflections of the transducer that result in fluctuations of transducer efficiency with frequency. Also, waves propagating inside the substrate ("bulk-waves") can interfere with those propagating on the surface.

Finally, in acousto-optic devices like the one shown in Fig. 1, a coupling between acoustic waveguides 12 and 13 may develop. If such coupling develops, the efficiency of both converters is decreased. To function effectively, then, the waveguides 12 and 13 must be separated by a relatively large distance (typically 200
5 microns). This required separation limits the degree to which the devices can be integrated.

U.S. Patent No. 5,002,349 discusses the integration of acousto-optic filters and switches. The objects of the invention are to provide an efficient acousto-optic structure on an x-cut piezoelectric substrate and to provide an acousto-optic filter and
10 coupler that do not incur an optical frequency shift and that are polarization independent. To achieve these objects, the invention includes a two-stage acousto-optic filter fabricated as an integrated circuit with an acoustic absorber between the two stages.

European Patent Application EP 0737880A1 discusses an acoustooptical waveguide device for wavelength selection. As shown in Fig. 4, the device includes an acoustic absorbing means placed along an acoustic waveguide 41, close to the end of optical waveguide 36 that is connected to coupler 37 to absorb the residual acoustic wave. It also includes an acoustic absorbing means placed close to the end
15 of waveguide 34 that is connected to coupler 32 to absorb the acoustic wave generated by transducer 44 propagating in a direction opposite to the optical signals.
20

UK Patent Application (Publication No. GB 2,304,917) entitled "Integrated Optical Devices" discloses a tunable filter having an acoustic waveguide parallel to an optical waveguide. The application discloses two methods of controlling the power density of an advancing acoustic wave and, thus, the power transfer to the optical
25 wave. First, the acoustic waveguide can have a varying cross-sectional area. Second, the energy of the acoustic wave can be absorbed along the length of the acoustic waveguide.

Finally, a publication entitled "Passband Engineering of Acousto-Optic Tunable Filters" by R.S. Chakravarthy et al. (1995 ECIO Proceedings, paper TuPo, Poster Session, p.137-40) investigates solutions to the problems of interchannel crosstalk and wavelength misalignment crosstalk in acousto-optic tunable filters. The authors propose, among other things, placing an attenuating overlay symmetrically
30 along the length of the device taking care to avoid the optical waveguides. The device structure is shown in Figs. 4(a) and 5(a).

The inventor has discovered that these techniques do not solve the problems recognized by the inventor. The inventor has found a need, therefore, for an acousto-optic device that reduces the parasitic effects of surface acoustic waves.

5

SUMMARY OF THE INVENTION

We have found that an acoustic absorber placed at predetermined locations around the acoustic waveguides and the optical waveguides acts to reduce or eliminate the problem created by the above-described parasitic effects. An acousto-optic device according to one aspect of the present invention includes a substrate of a
10 material capable of propagating a surface acoustic wave along a portion of the surface of the substrate, a transducer for generating the surface acoustic wave, an optical waveguide formed in the substrate, and an acoustic absorber surrounding said portion of the substrate.

An acousto-optic switch according to another aspect of the present invention
15 includes a substrate of a material capable of propagating a surface acoustic wave along a surface of the substrate, first and second optical waveguides formed in the substrate, first and second acoustic waveguides contacting the first and second optical waveguides, respectively, each having a first end and a second end, first and second transducers for generating a surface acoustic wave in the first and second
20 acoustic waveguides, respectively, and an acoustic absorber surrounding the first and second acoustic waveguides.

Another acousto-optic device according to yet another aspect of the present invention includes a substrate of a material capable of propagating a surface acoustic wave along a surface of the substrate, at least one optical waveguide formed in the
25 substrate, at least one acoustic waveguide formed in the substrate, at least one transducer for generating a surface acoustic wave, and an acoustic absorber surrounding the at least one acoustic waveguide.

Another acousto-optic switch according to another aspect of the present invention includes a substrate of a material capable of propagating a surface acoustic
30 wave along a surface of the substrate, first and second optical waveguides formed in the substrate, first and second acoustic waveguides contacting the first and second optical waveguides, respectively, each having a first end and a second end, first and second transducers for generating a surface acoustic wave in the first and second acoustic waveguides, respectively, and an acoustic absorber disposed between the

first and second acoustic waveguides.

A method consistent with the present invention includes the steps of providing a substrate having an optical waveguide and an acoustic waveguide formed therein, wherein the optical waveguide and the acoustic waveguide form an acousto-optic interaction region, and absorbing scattered acoustic waves in a region surrounding the acousto-optic interaction region.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

10

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate presently preferred implementations of the invention and, together with the general description given above and the detailed description of the preferred implementations given below, serve to explain the principles of the invention.

15

Fig. 1 is a drawing of a typical 2 x 2 acousto-optic switch;

Fig. 2 is a drawing of a 2 x 2 acousto-optic switch consistent with the present invention;

20

Fig. 3 is a drawing of a region surrounding the transducer of Fig. 2 according to one embodiment of the invention;

Fig. 4 is a drawing of a region surrounding the transducer of Fig. 2 according to another embodiment of the invention;

Fig. 5a is a drawing of the filter characteristic of a typical 2 x 2 acousto-optic switch without acoustic absorbers.

25

Fig. 5b is a drawing of the notch characteristic of a typical 2 x 2 acousto-optic switch without acoustic absorbers;

Fig. 6 is a drawing of the filter and notch characteristics of a 2 x 2 acousto-optic switch consistent with the present invention;

30

Fig. 7 is a drawing of acoustic power distribution in an acousto optic device without acoustic absorbers; and

Fig. 8 is a drawing of acoustic power distribution in an acousto optic device with acoustic absorbers.

DETAILED DESCRIPTION

Reference will now be made in detail to the construction and operation of preferred implementations of the present invention which are illustrated in the accompanying drawings.

5 The following description of the preferred implementations of the present invention is only exemplary of the invention. The present invention is not limited to these implementations, but may be realized by other implementations.

 An acousto-optic device consistent with the present invention is shown in Fig. 2. In this embodiment, the device is a 2 x 2 tunable optic switch having optical
10 waveguides 30, 31, 32, 33, 34 and 35, polarization splitters 36, acoustic waveguides 23 and 37, and piezoelectric transducers 24 and 25. The device is formed on the surface of a crystal 26, such as LiNbO₃. The device is modified in the following ways to minimize the parasitic effects of the SAWs generated by transducers 24 and 25.

 First, the entire acousto-optic conversion region is surrounded by an acoustic
15 absorber 27, thus suppressing the effects caused by scattering and/or reflection of irradiated waves.

 In a different embodiment, not shown, each acousto-optic conversion region is surrounded by a separate acoustic absorber.

 Second, acoustic absorber 27' is placed near transducers 24 and 25 to absorb
20 radiated waves emitted from the transducers but not coupled to the waveguides.

 Also, a stripe 28 of acoustic absorber is placed between acoustic waveguides 23 and 37. Preferably, stripe 28 is approximately 50 microns wide. It serves to reduce the acoustical crosstalk between the convertors, enhancing the conversion efficiency. This enhanced isolation between the convertors can be used to reduce
25 the gap between them, thus decreasing the overall device size, allowing for a higher degree of integration, and improving the device characteristics.

 The acoustic absorber is also used close to the end of acoustic waveguides 23 and 37 to include a V-shaped structure 29 behind transducers 24 and 25. The structure 28 absorbs acoustic waves generated in that direction. The structure 29,
30 used in conjunction with the acoustic absorber placement described above, has a number of advantages. First, there is a more distributed absorption of the SAW, resulting in less local heating. Second, since structure 29 absorbs some of the acoustic waves, the acoustic absorber is mechanically less stressed by the acoustic wave. Preferably, the ends of acoustic waveguides 23 and 37 opposite transducers

24 and 25 are also surrounded by a V-shaped absorbing structure, resulting in similar advantages to those discussed above. Although a V-shaped structure 29 is shown, any geometry suitable to a desired distribution of absorbed energy and heat may be used.

5 The inventor has further recognized that the irradiation of acoustic waves along directions other than the direction of the acoustic waveguide (i.e., unguided acoustic waves) takes place not only from the transducer itself, but also from a portion further down the acoustic waveguide where the SAW is stronger. Figs. 3 and 4 show two structures that limit irradiation from this portion by increasing the length of the acoustic waveguide. Fig. 3 shows an acoustic waveguide 40 having a transducer 10 41 forming a SAW 42 along acoustic waveguide 40. Acoustic waveguide 40 is surrounded by an acoustic absorber 43. To limit irradiation of acoustic energy from a portion down acoustic waveguide 40 from transducer 41, acoustic waveguide 40 is extended by 2-3 mm.

15 The extension of acoustic waveguide 40, however, has the effect of increasing the overall device size. Therefore, in the embodiment shown in Fig. 4, acoustic waveguide 45 is extended, but also bent toward the center of the device. Although a small acoustic loss of about 0.5 dB can be expected due to the bend, the size of the device is not changed. As with the structure shown in Fig. 3, the structure of Fig. 4 20 also has the effect of limiting the irradiation of unguided acoustic waves emanating from the SAW 42 at a portion down acoustic waveguide 45 from transducer 41.

 To maximize the effectiveness of the acoustic absorber used in the acousto-optic device, the material used for the acoustic absorber should possess certain characteristics. It should have, for example, a high acoustic attenuation coefficient to 25 allow for efficient isolation of neighboring structures, and small reflectivity to avoid interference effects. It should also be easy to fabricate, resist heat, and maintain its characteristics over the life of the device. Polyimides, one of a large family of polymers, satisfy these requisites due to their basic chemical structure. Polyimides are commercially available from Ciba-Geigy, such as in the Probimide 400 and 7000 30 series.

 Further, additives can be added to polyimides making them photosensitive. Thus, the polyimides act as a photoresist and can be deposited on the acousto-optic device by simple means of microlithography. Specifically, we have found that Probimide 408 and 7020 possess particularly advantageous properties for use as

acoustic absorbers. When deposited in the pattern described above at a thickness of 20 microns, polyimides exhibit an attenuation coefficient of approximately 23 dB/mm at a frequency of approximately 170 MHz. This measurement was taken with the absorber oriented at a right angle to the acoustic waves.

5 Referring to Fig. 2, using a 50 micron wide stripe 28 along the separating gap reduces the acoustic crosstalk between the convertors from -15 dB to less than -25 dB, resulting in increased conversion efficiency. This measurement was taken with the absorber oriented parallel to the acoustic wave. The enhanced isolation can also be used to shorten the gap between the convertors. Experiments show that the gap
10 can be reduced by at least 25 percent (from 170 microns to 130 microns). Also, the length of the bending section can be shortened by approximately 20 percent (from 8 mm to 6.5 mm). The benefits of this shortened length are multiplied when double stage devices are used. As discussed above, the shortened gap and bending section length lead to increased integration of the acousto-optic devices.

15 Fig. 5a shows the filter characteristic of a 2 x 2 acousto-optic switch without acoustic absorbers. The filter has a peak of approximately 22 dB above the noise floor. Fig. 5b shows the notch characteristic for the 2 x 2 switch without acoustic absorbers. The notch extinction is approximately 17 dB. Fig. 6, on the other hand, shows the filter and notch characteristics for a 2 x 2 switch with acoustic absorbers.
20 The filter characteristic has a peak of approximately 25 dB above the noise floor, while the notch extinction has improved to approximately 22 dB. The side lobes have been reduced from -18 dB to approximately -22 dB, and the crosstalk has been reduced to below -25 dB.

Fig. 7 shows the acoustic propagation in an acousto optic device without the
25 acoustic absorbers. The propagation is not confined to the acoustic waveguide 50, but rather irradiates throughout the device. These irradiated and unguided waves, such as those along line 55, propagate across the optical waveguide and interfere with acousto optic conversion. Fig. 8, in contrast, shows the same device using the teaching of the present invention. Unlike in Fig. 7, the acoustic propagation is largely
30 confined to the acoustic waveguide 60, enhancing the overall efficiency of the device.

While there has been illustrated and described what are at present considered to be preferred embodiments of the present invention, it will be understood by those skilled in the art that various changes and modifications may be made, and equivalents may be substituted for elements thereof without departing from the true

scope of the invention. For example, other materials, such as silicon, may possibly be used as the acoustic absorber in the place of polyimides.

In addition, many modifications may be made to adapt a particular element, technique or implementation to the teachings of the present invention without
5 departing from the central scope of the invention. Therefore, it is intended that this invention not be limited to the particular embodiments disclosed herein, but that the invention includes all embodiments falling within the scope of the appended claims and their equivalents.

We claim:

1. An acousto-optic device comprising:
a substrate of a material capable of propagating a surface acoustic wave
along a portion of the surface of the substrate;
5 a transducer for generating the surface acoustic wave;
an optical waveguide formed in the substrate; and
an acoustic absorber surrounding said portion of the substrate.
2. The acousto-optic device of claim 1 wherein
10 the substrate material is LiNbO_3 .
3. The acousto-optic device of claim 1 wherein
the acoustic absorber contains polyimides.
4. The acousto-optic device of claim 1 further including
15 an acoustic absorber placed near the transducer.
5. The acousto-optic device of claim 1 further including
an acoustic waveguide for directing the surface acoustic wave toward the
20 optical waveguide.
6. The acousto-optic device of claim 5 wherein
an end of the acoustic waveguide containing the transducer is extended by at
least 2 mm.
25
7. The acousto-optic device of claim 6 wherein
the extended acoustic waveguide is bent.
8. The acousto-optic device of claim 5 having an end acoustic absorber
30 placed near a terminating end of the acoustic waveguide, said end absorber being of
a shape to absorb acoustic energy.
9. The acousto-optic device of claim 8 wherein
said end absorber has a V-shape.

10. An acousto-optic switch comprising:
a substrate of a material capable of propagating a surface acoustic wave
along a surface of the substrate;
5 first and second optical waveguides formed in the substrate;
first and second acoustic waveguides contacting the first and second optical
waveguides, respectively, each having a first end and a second end;
first and second transducers for generating a surface acoustic wave in the first
and second acoustic waveguides, respectively; and
10 an acoustic absorber surrounding the first and second acoustic waveguides.
11. The acousto-optic switch of claim 10 wherein
the substrate material is LiNbO_3 .
- 15 12. The acousto-optic switch of claim 10 wherein
the acoustic absorber contains polyimides.
13. The acousto-optic switch of claim 10 further including
an acoustic absorber placed near the first and/or second transducers.
20
14. The acousto-optic switch of claim 10 further including
a strip of acoustic absorber disposed between the first and second acoustic
waveguides.
- 25 15. The acousto-optic switch of claim 14 wherein
the strip of acoustic absorber is at least 50 microns wide.
16. The acousto-optic switch of claim 10 having an end acoustic absorber
placed near the at least one end of the first acoustic waveguide, said end absorber
30 being of a shape to absorb acoustic energy.
17. The acousto-optic switch of claim 16 wherein
the end acoustic absorber has a V-shape.

18. The acousto-optic switch of claim 10 having an end acoustic absorber placed near at least one end of the second acoustic waveguide, said end absorber being of a shape to absorb acoustic energy.

5 19. The acousto-optic switch of claim 18 wherein the end acoustic absorber has a V-shape.

 20. The acousto-optic device of claim 10 wherein the ends of the first and second acoustic waveguides containing the
10 transducers are extended by at least 2 mm.

 21. The acousto-optic device of claim 20 wherein the extended acoustic waveguides are bent.

15 22. An acousto-optic device comprising:
 a substrate of a material capable of propagating a surface acoustic wave along a surface of the substrate;
 at least one optical waveguide formed in the substrate;
 at least one acoustic waveguide formed in the substrate;
20 at least one transducer for generating a surface acoustic wave; and
 an acoustic absorber surrounding the at least one acoustic waveguide.

 23. The acousto-optic switch of claim 22 wherein the substrate material is LiNbO_3 .
25

 24. The acousto-optic device of claim 22 wherein the acoustic absorber contains polyimides.

 25. The acousto-optic device of claim 22 further including
30 an acoustic absorber placed near the at least one transducer.

 26. The acousto-optic device of claim 22 having an end acoustic absorber placed near an end of the at least one acoustic waveguide, said end absorber being of a shape to absorb acoustic energy.

27. The acousto-optic device of claim 26 wherein the end absorber has a V-shape.

5 28. The acousto-optic device of claim 22 wherein there are two optical waveguides.

29. The acousto-optic device of claim 28 further including a strip of acoustic absorber disposed between the two optical waveguides.

10

30. The acousto-optic device of claim 29 wherein the strip of acoustic absorber is at least 50 microns wide.

31. The acousto-optic device of claim 22 wherein an end of the at least one acoustic waveguide containing the transducer is extended by at least 2 mm.

15

32. The acousto-optic device of claim 31 wherein the at least one extended acoustic waveguide is bent.

20

33. An acousto-optic switch comprising:
a substrate of a material capable of propagating a surface acoustic wave along a surface of the substrate;
first and second optical waveguides formed in the substrate;
25 first and second acoustic waveguides contacting the first and second optical waveguides, respectively, each having a first end and a second end;
first and second transducers for generating a surface acoustic wave in the first and second acoustic waveguides, respectively; and
an acoustic absorber disposed between the first and second acoustic
30 waveguides.

34. The acousto-optic switch of claim 33 wherein the substrate material is LiNbO_3 .

35. The acousto-optic switch of claim 33 wherein the acoustic absorber contains polyimides.

5 36. The acousto-optic switch of claim 33 further including an acoustic absorber surrounding the first and second optical waveguides and the first and second acoustic waveguides.

10 37. The acousto-optic switch of claim 33 wherein the acoustic absorber is at least 50 microns wide.

38. The acousto-optic switch of claim 33 having an end acoustic absorber placed near the at least one end of the first and/or second acoustic waveguides, said end absorber being of a shape to absorb acoustic energy.

15 39. The acousto-optic switch of claim 38 wherein the end acoustic absorber has a V-shape.

20 40. The acousto-optic device of claim 33 wherein the ends of the first and second acoustic waveguides containing the transducers are extended by at least 2 mm.

41. The acousto-optic device of claim 40 wherein the extended acoustic waveguides are bent.

25 42. A method for limiting parasitic effects in acousto-optic device comprising the steps of:

providing a substrate having an optical waveguide and an acoustic waveguide formed therein, wherein the optical waveguide and the acoustic waveguide form an acousto-optic interaction region; and

30 absorbing scattered acoustic waves in a region surrounding the acousto-optic interaction region.

THIS PAGE BLANK (USPTO)

1/6

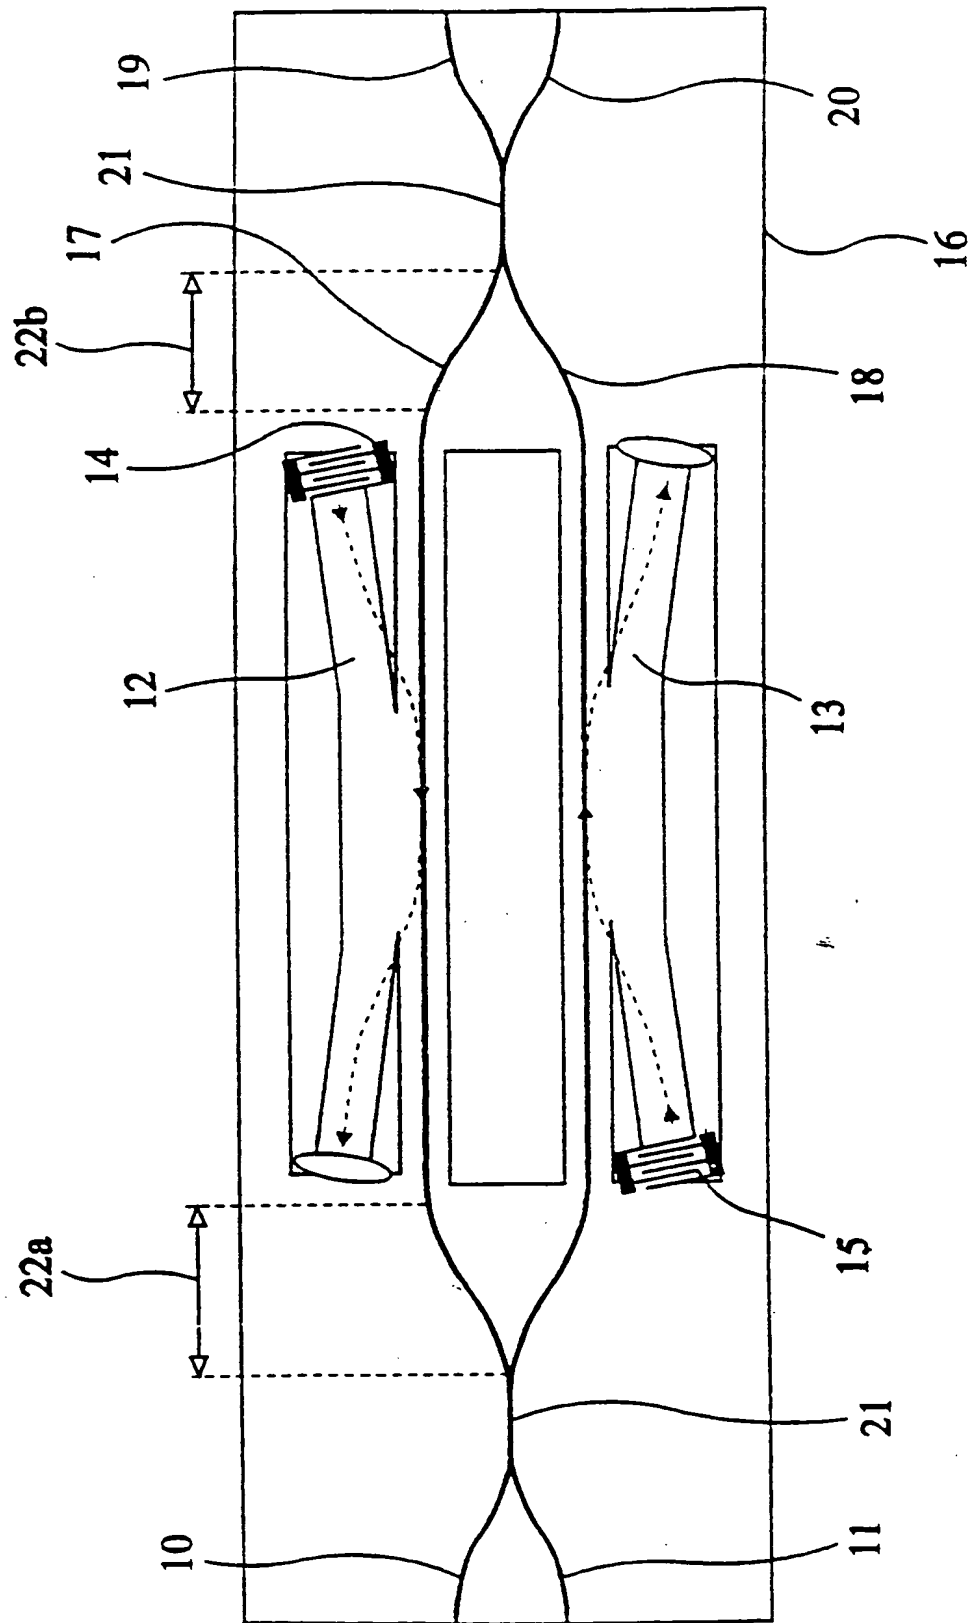


Fig. 1

THIS PAGE BLANK (USPTO)

2/6

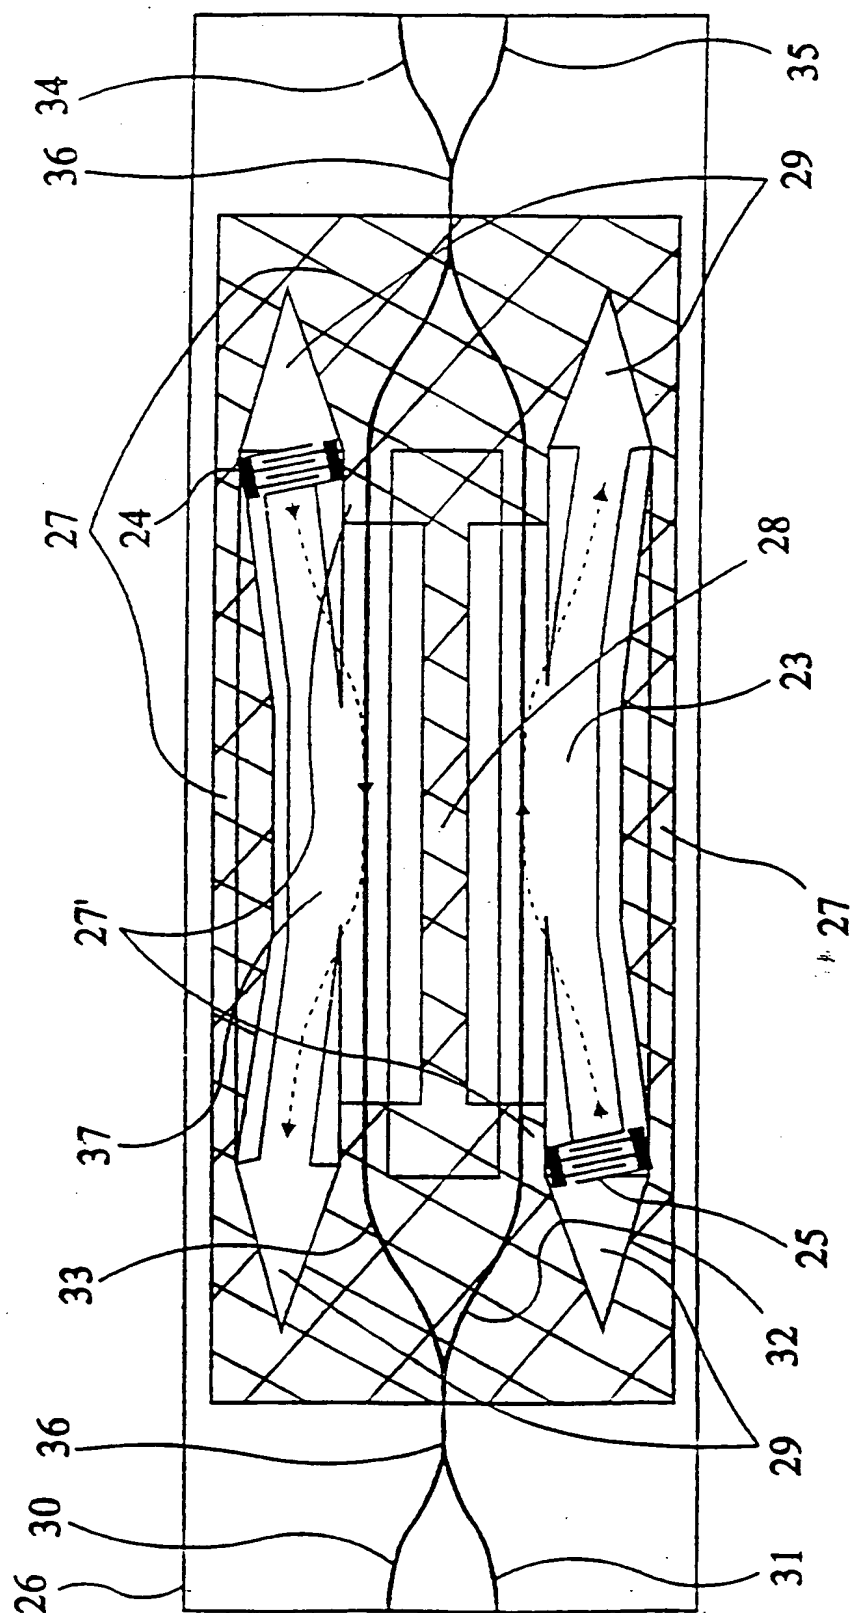


Fig. 2

SUBSTITUTE SHEET (rule 26)

THIS PAGE BLANK (USPTO)

3/6

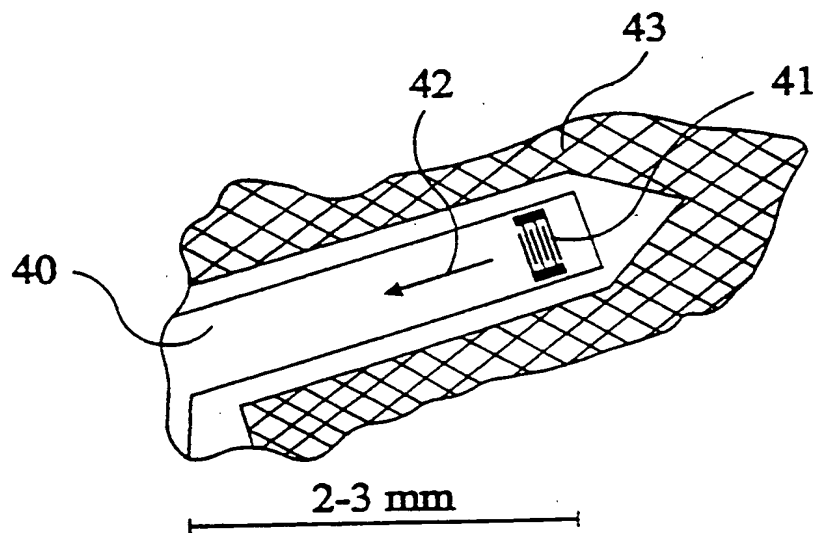


Fig. 3

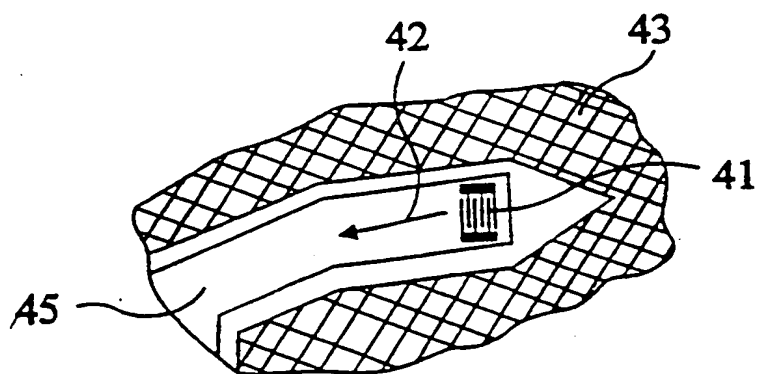


Fig. 4

THIS PAGE BLANK (USPTO)

4/6

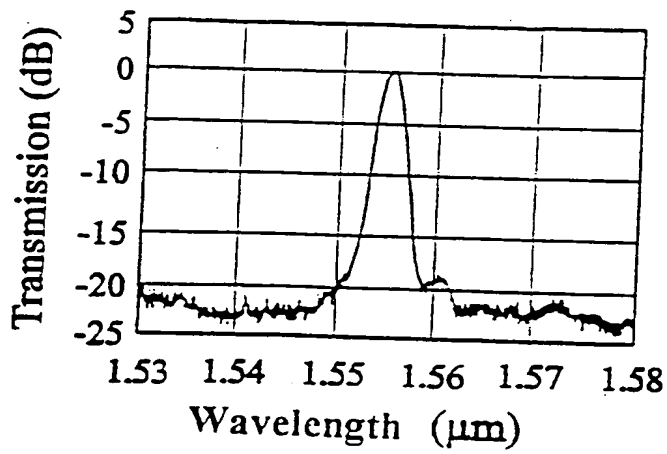


Fig. 5a

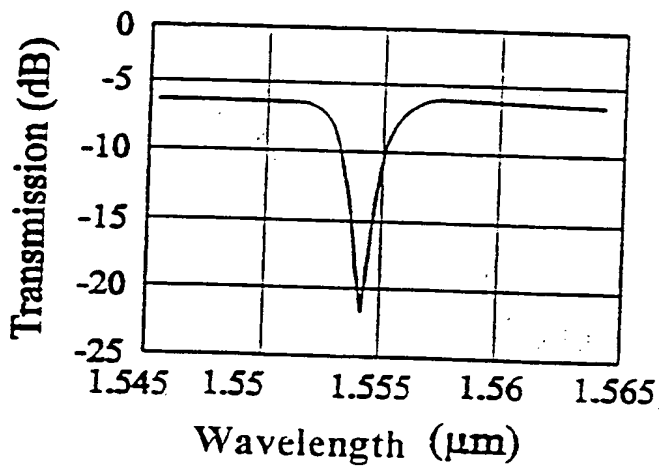


Fig. 5b

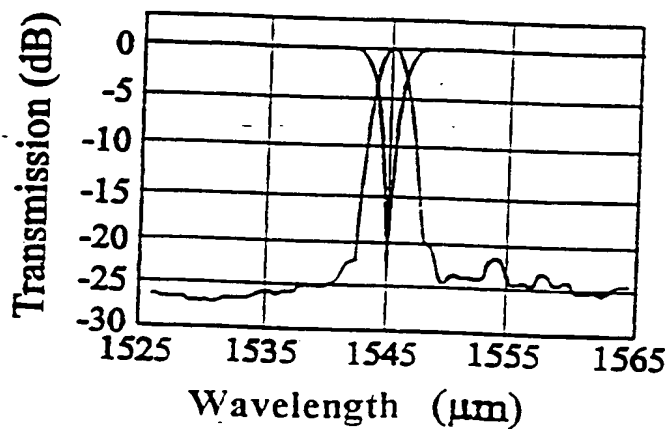


Fig. 6

THIS PAGE BLANK (USPTO)

5/6

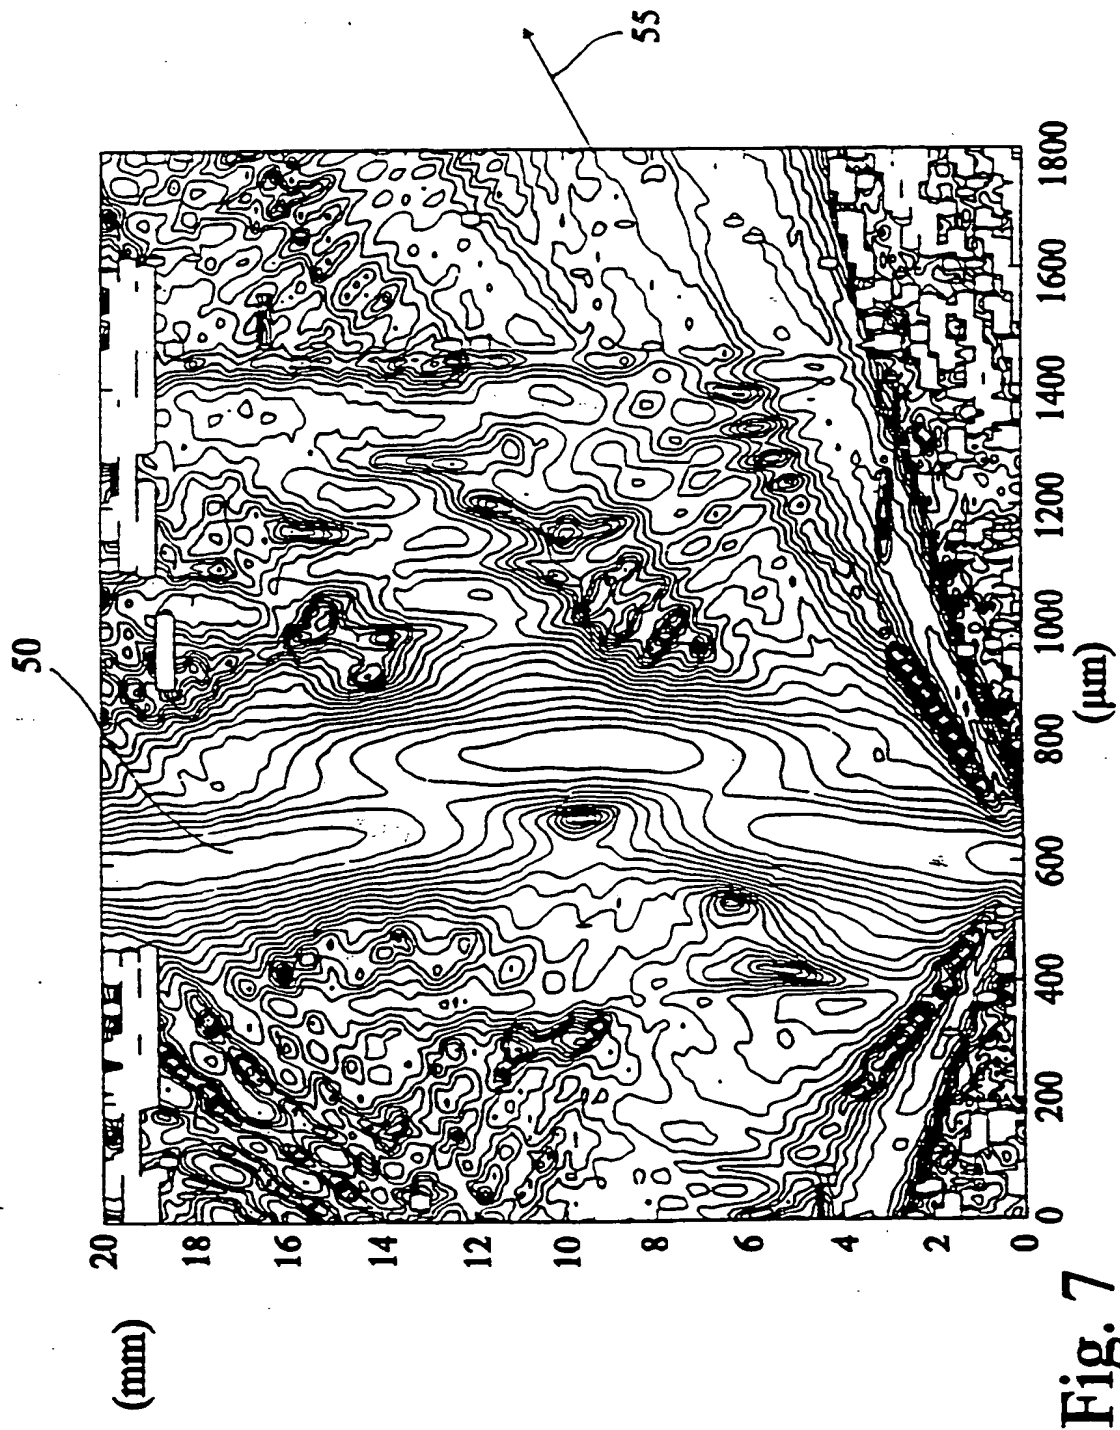


Fig. 7

THIS PAGE BLANK (USPTO)

6/6

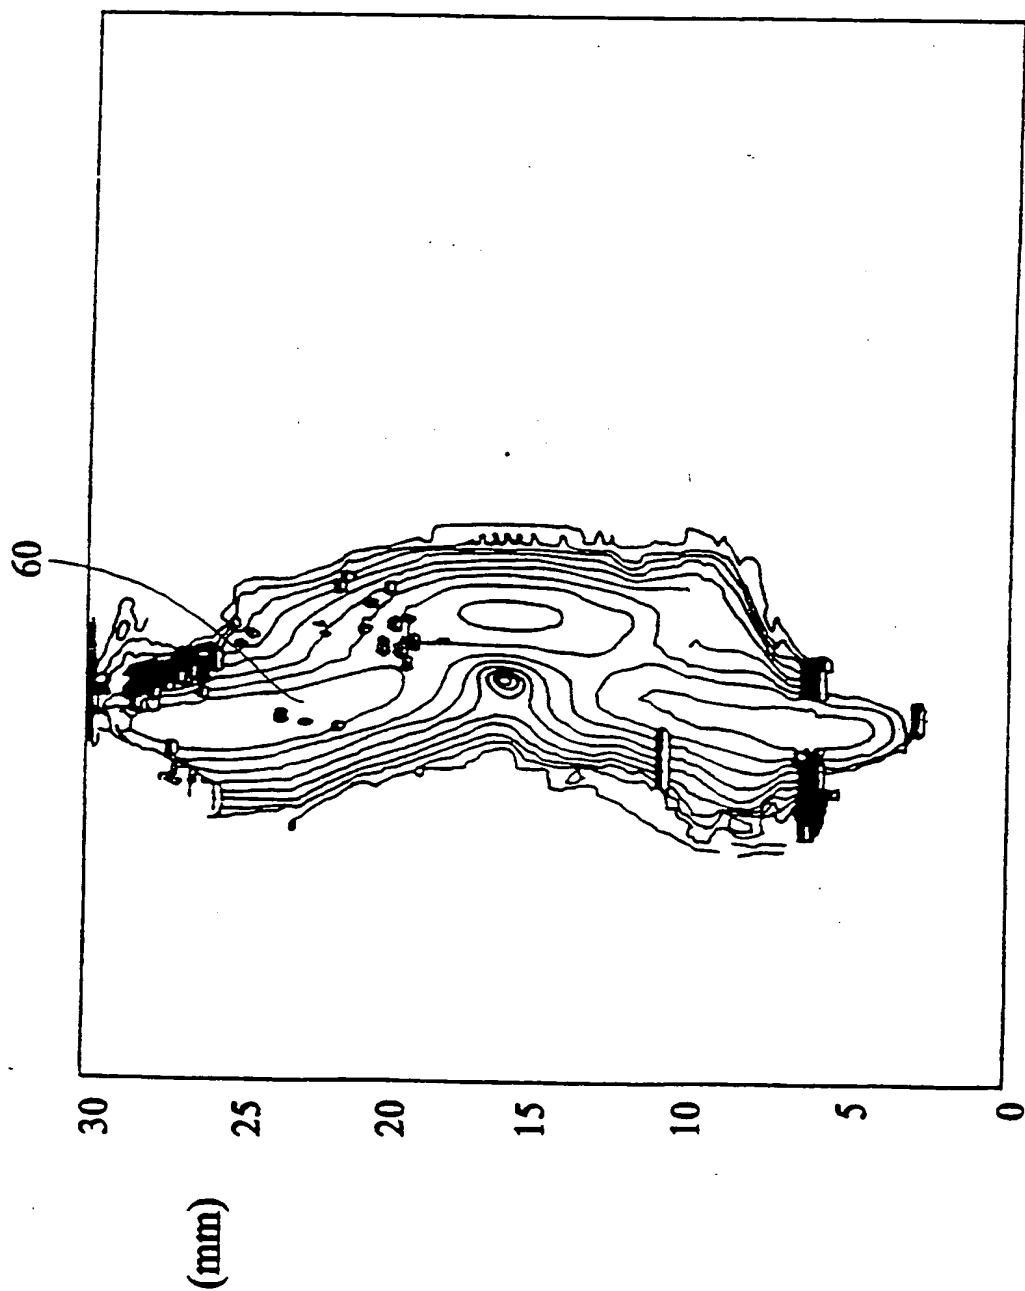


Fig. 8

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

national Application No.
PCT/EP 98/04

CLASSIFICATION OF SUBJECT MATTER
C 6 G02F1/125

ording to International Patent Classification (IPC) or to both national classification and IPC

FIELDS SEARCHED

imum documentation searched (classification system followed by classification symbols)
C 6 G02F

umentation searched other than minimum documentation to the extent that such documents are included in the fields searched

tronic data-base consulted during the international search (name of data base and, where practical, search terms used)

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	CHAKRAVARTHY R S ET AL: "PASSBAND ENGINEERING OF ACOUSTO-OPTIC TUNABLE FILTERS" PROCEEDINGS EUROPEAN CONFERENCE ON INTEGRATED OPTICS WITH TECHNICAL EXHIBIT, 3 April 1995, pages 137-140, XP000197994 cited in the application ---	1, 10, 22, 33, 42
	GB 2 304 917 A (INTEGRATED OPTICAL COMPONENTS) 26 March 1997 cited in the application see page 3, line 12 - page 5, line 15 ---	1, 10, 22, 33, 42
	-/--	

Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

Special categories of cited documents:

document defining the general state of the art which is not
considered to be of particular relevance
earlier document but published on or after the international
filing date
document which may throw doubts on priority claim(s) or
which is cited to establish the publication date of another
citation or other special reason (as specified)
document referring to an oral disclosure, use, exhibition or
other means
document published prior to the international filing date but
later than the priority date claimed

"T" later document published after the international filing date
or priority date and not in conflict with the application but
cited to understand the principle or theory underlying the
invention
"X" document of particular relevance: the claimed invention
cannot be considered novel or cannot be considered to
involve an inventive step when the document is taken alone
"Y" document of particular relevance: the claimed invention
cannot be considered to involve an inventive step when the
document is combined with one or more other such docu-
ments, such combination being obvious to a person skilled
in the art.
"&" document member of the same patent family

3 of the actual completion of the international search

Date of mailing of the international search report

16 November 1998

24/11/1998

1e and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Diot, P

INTERNATIONAL SEARCH REPORT

national Application No.

PCT/EP 98/04109

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	SMITH D A ET AL: "ACOUSTO-OPTIC SWITCH WITH A NEAR RECTANGULAR PASSBAND FOR WDM SYSTEMS" ELECTRONICS LETTERS, vol. 32, no. 6, 14 March 1996, page 542/543 XP000593623 ---	1,42
A	EP 0 737 880 A (PIRELLI) 16 October 1996 cited in the application see column 4, line 39 - line 51 see column 16, line 45 - column 17, line 10 see column 13, line 45 - line 51 ---	1.10,22, 33,42
A	US 5 002 349 A (CHEUNG) 26 March 1991 cited in the application -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.

PCT/EP 98/04109

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
GB 2304917	A	26-03-1997	NONE		
EP 737880	A	16-10-1996	IT	MI950771 A	14-10-1996
			AU	5060496 A	24-10-1996
			BR	9601553 A	24-03-1998
			CA	2174070 A	15-10-1996
			CZ	9601071 A	16-10-1996
			HU	9600977 A	28-01-1997
			JP	8297265 A	12-11-1996
			NO	961471 A	15-10-1996
			NZ	286334 A	24-03-1997
			SK	47496 A	07-05-1997
			US	5781669 A	14-07-1998
US 5002349	A	26-03-1991	CA	2004998 A,C	29-05-1991

THIS PAGE BLANK (USPTO)